



Sennheiser Documentation App



or online at
www.sennheiser.com/download
evolution wired



e 614

Quick Guide

Kurzanleitung

Guide rapide

Guida rapida

Guía de inicio rápido

Guia rápido

Beknopte handleiding

Krótką instrukcja obsługi

Snabbguide

Kvikstartguide

Pikaohje

Γρήγορος οδηγός

Kisa Kilavuz

Краткая инструкция

快速指南

快速使用指南

クイックガイド

퀵 가이드


Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany
Publ. 05/23, 581327/A04


SENNHEISER

Setup

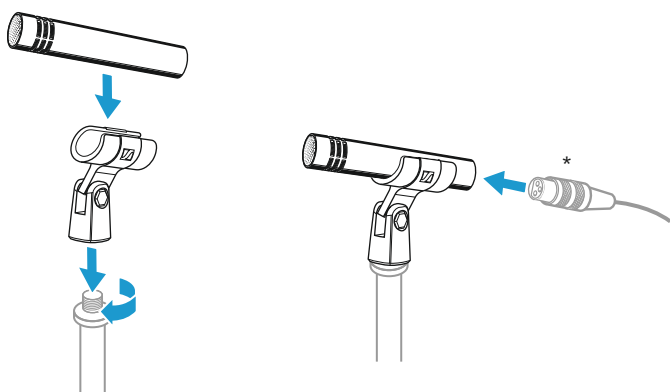



*XLR-3 cable not included

In the box

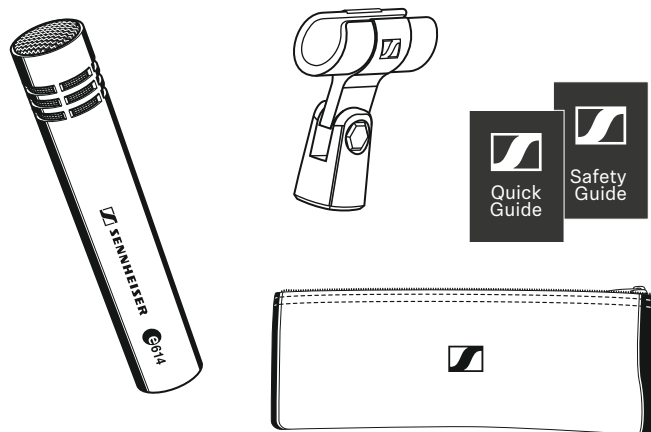


Overview

- 1 Sound inlet basket
- 2 XLR-3 connector

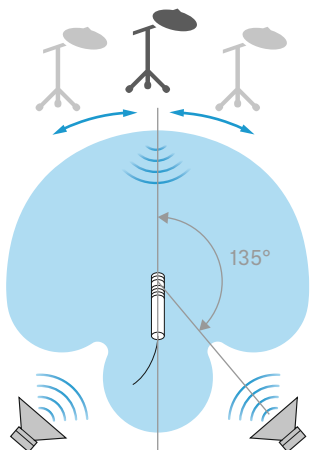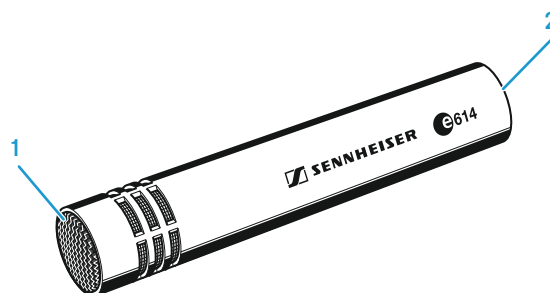


Accessory

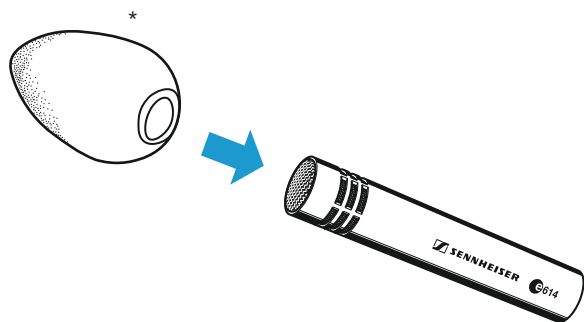

*MZW 64 not included


Cleaning

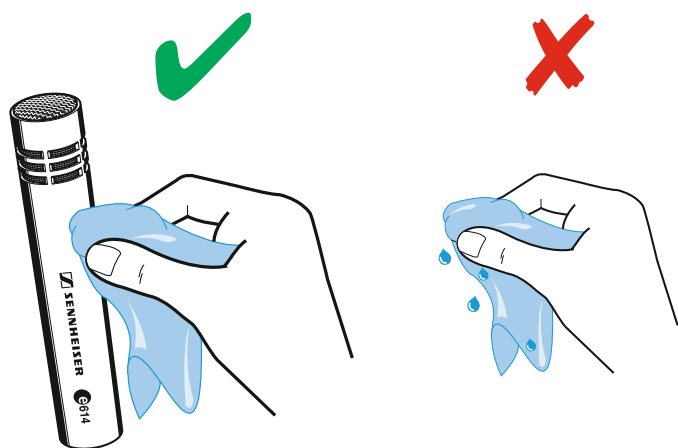

Specifications

Transducer principle	pre-polarised condenser microphone
Frequency response	40 - 20,000 Hz
Pick-up pattern	super-cardioid
Sensitivity (free field, at 1 kHz)	3 mV/Pa
Nominal impedance (at 1 kHz)	50 Ω
Min. terminating impedance	1 k Ω
Max. sound pressure level (at 1 kHz)	139 dB
Equivalent noise level	24 dB(A)
weighted as per CCIR	35 dB
Phantom powering	12 - 48 V
Connector	XLR-3
Dimensions	$\varnothing$ 20 x 100 mm
Weight	73 g

Connector assignment

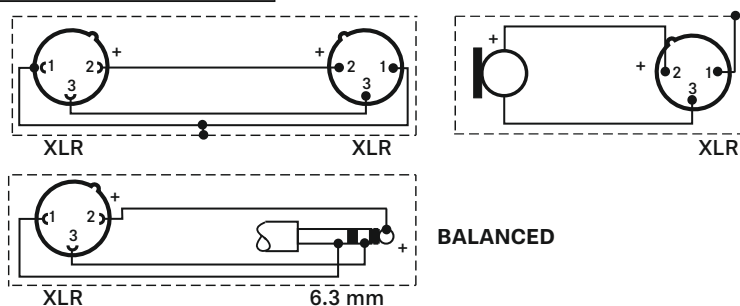

Polar pattern and frequency response

