




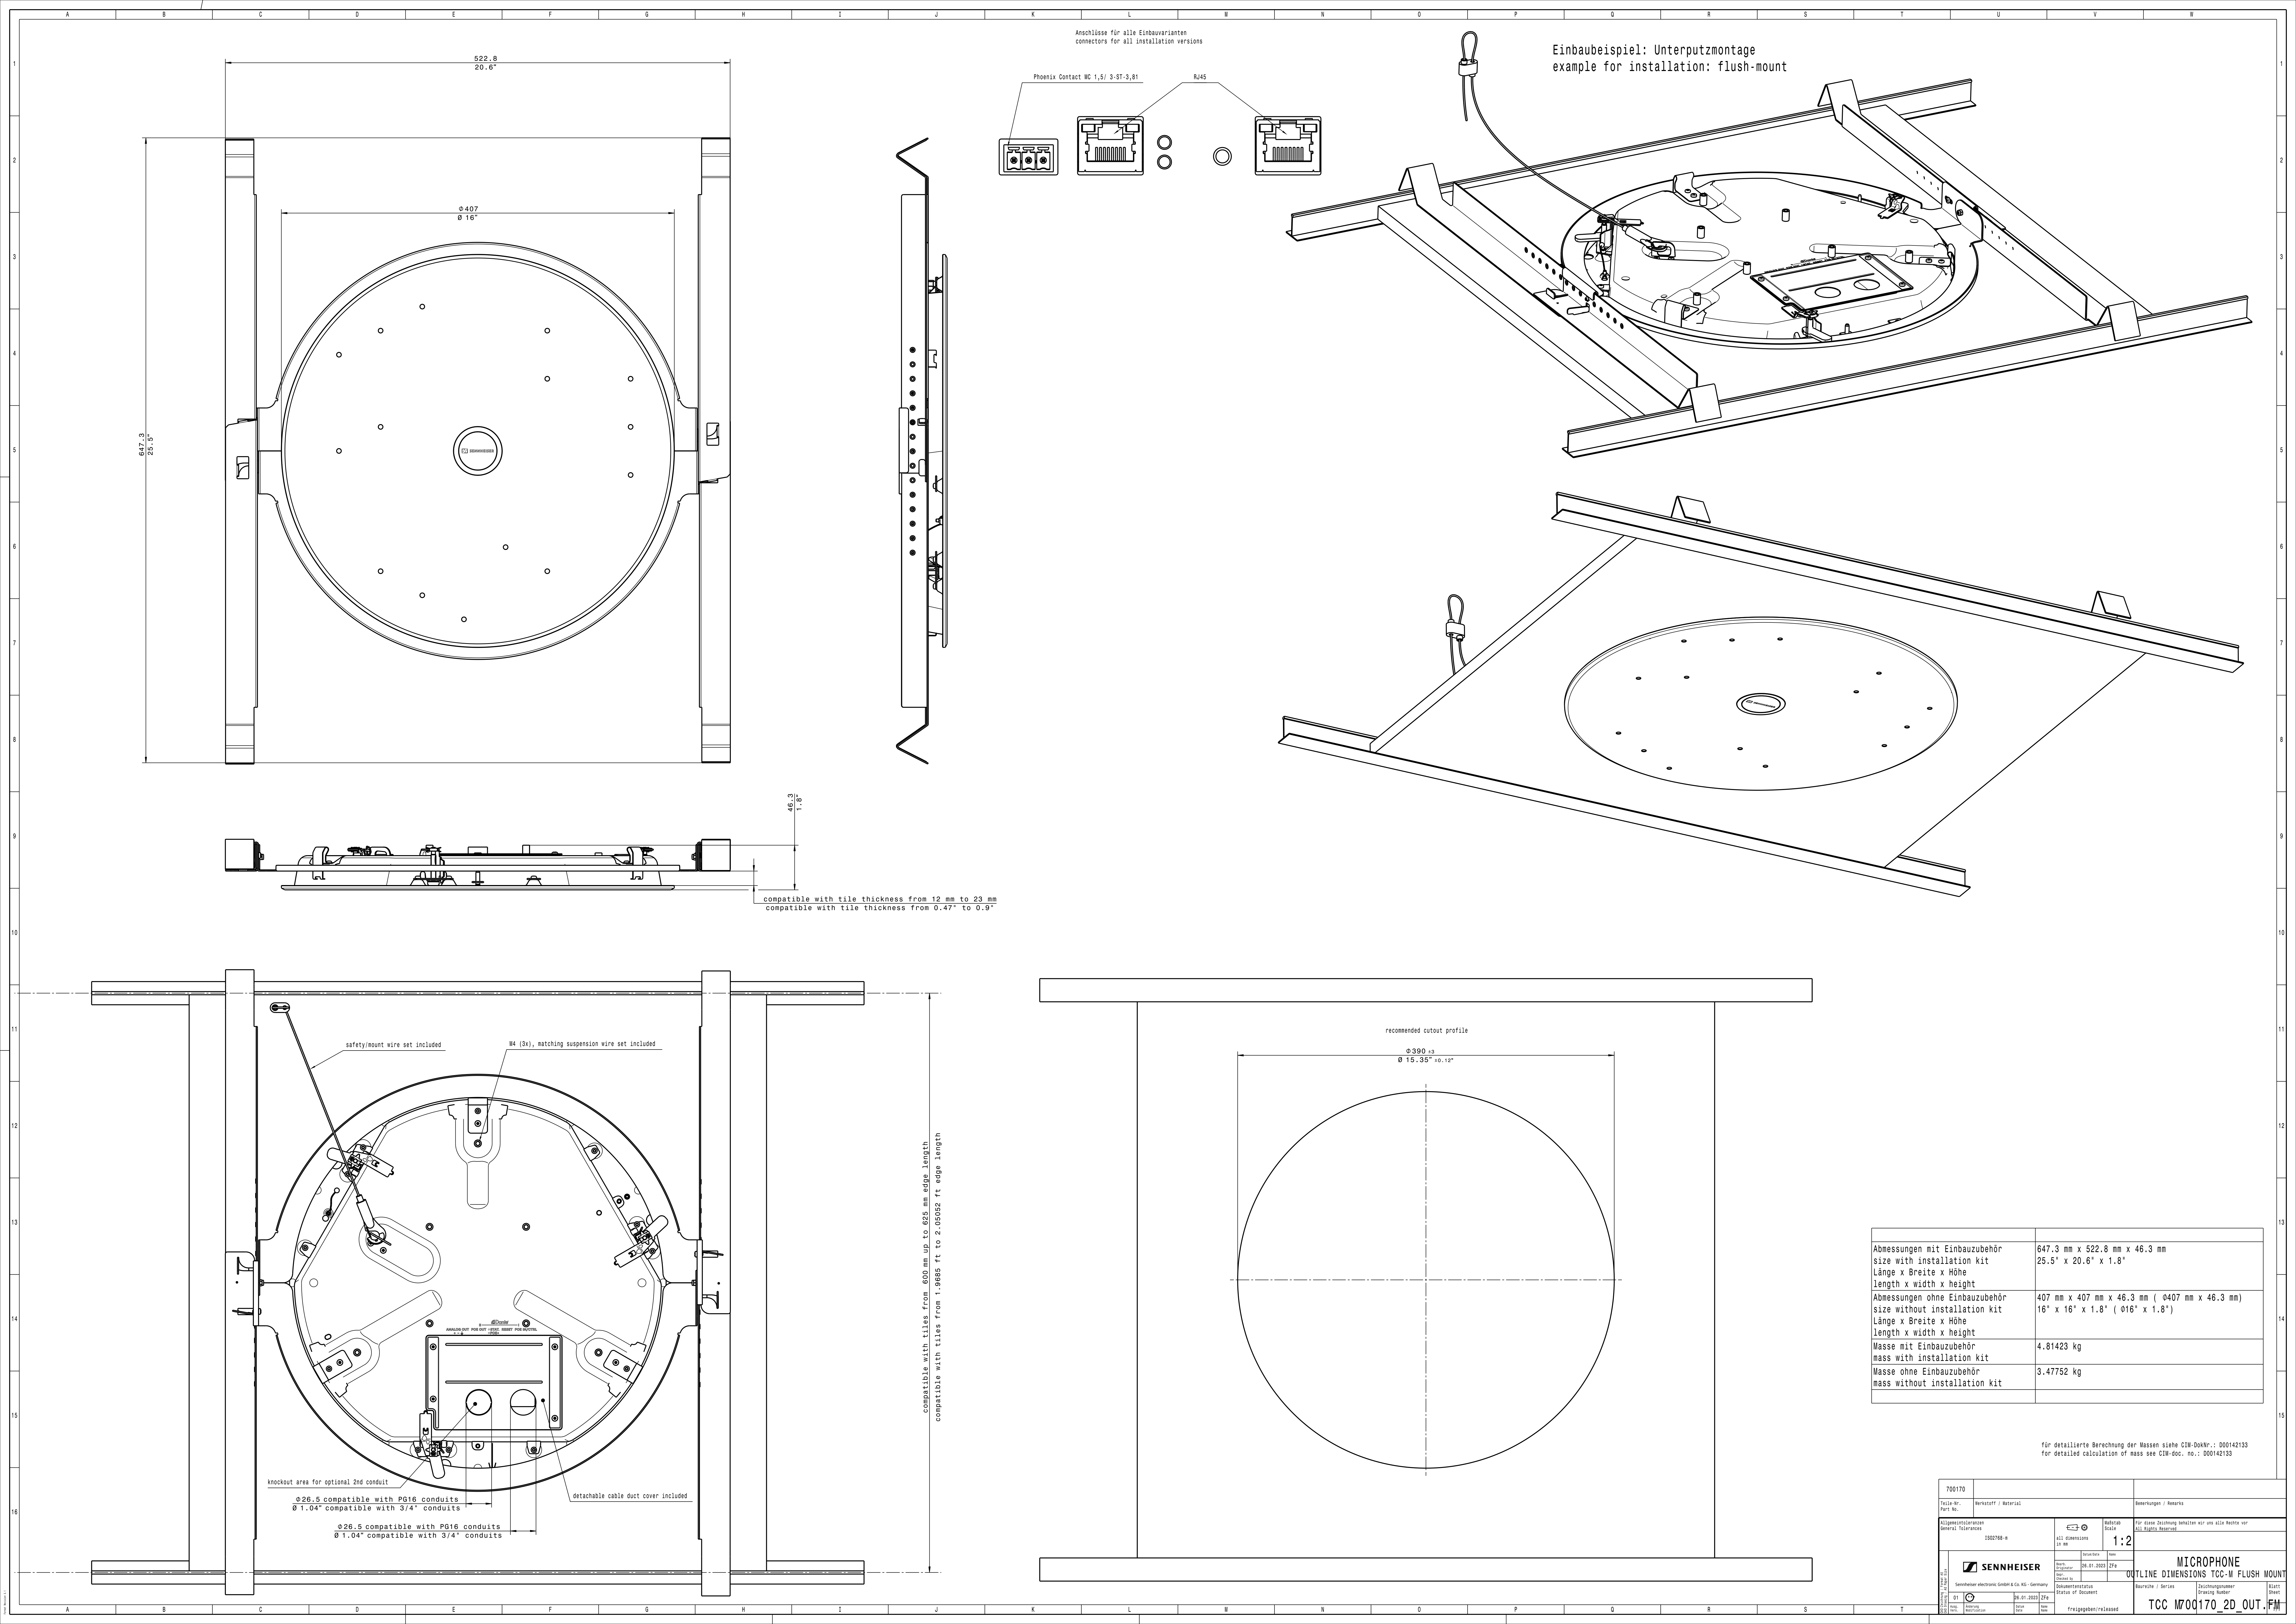

Anschlüsse für alle Einbauvarianten
connectors for all installation versions

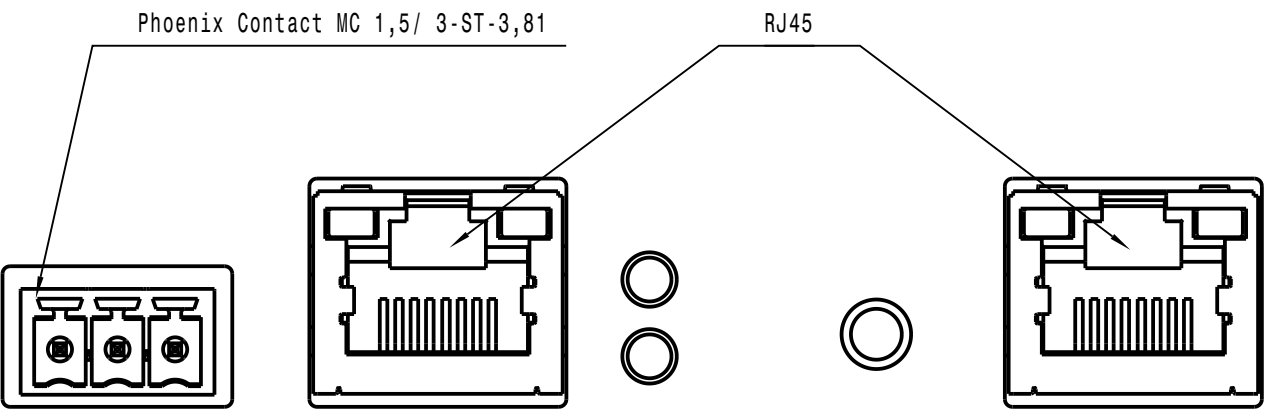

Einbaubeispiel: Unterputzmontage
example for installation: flush-mount

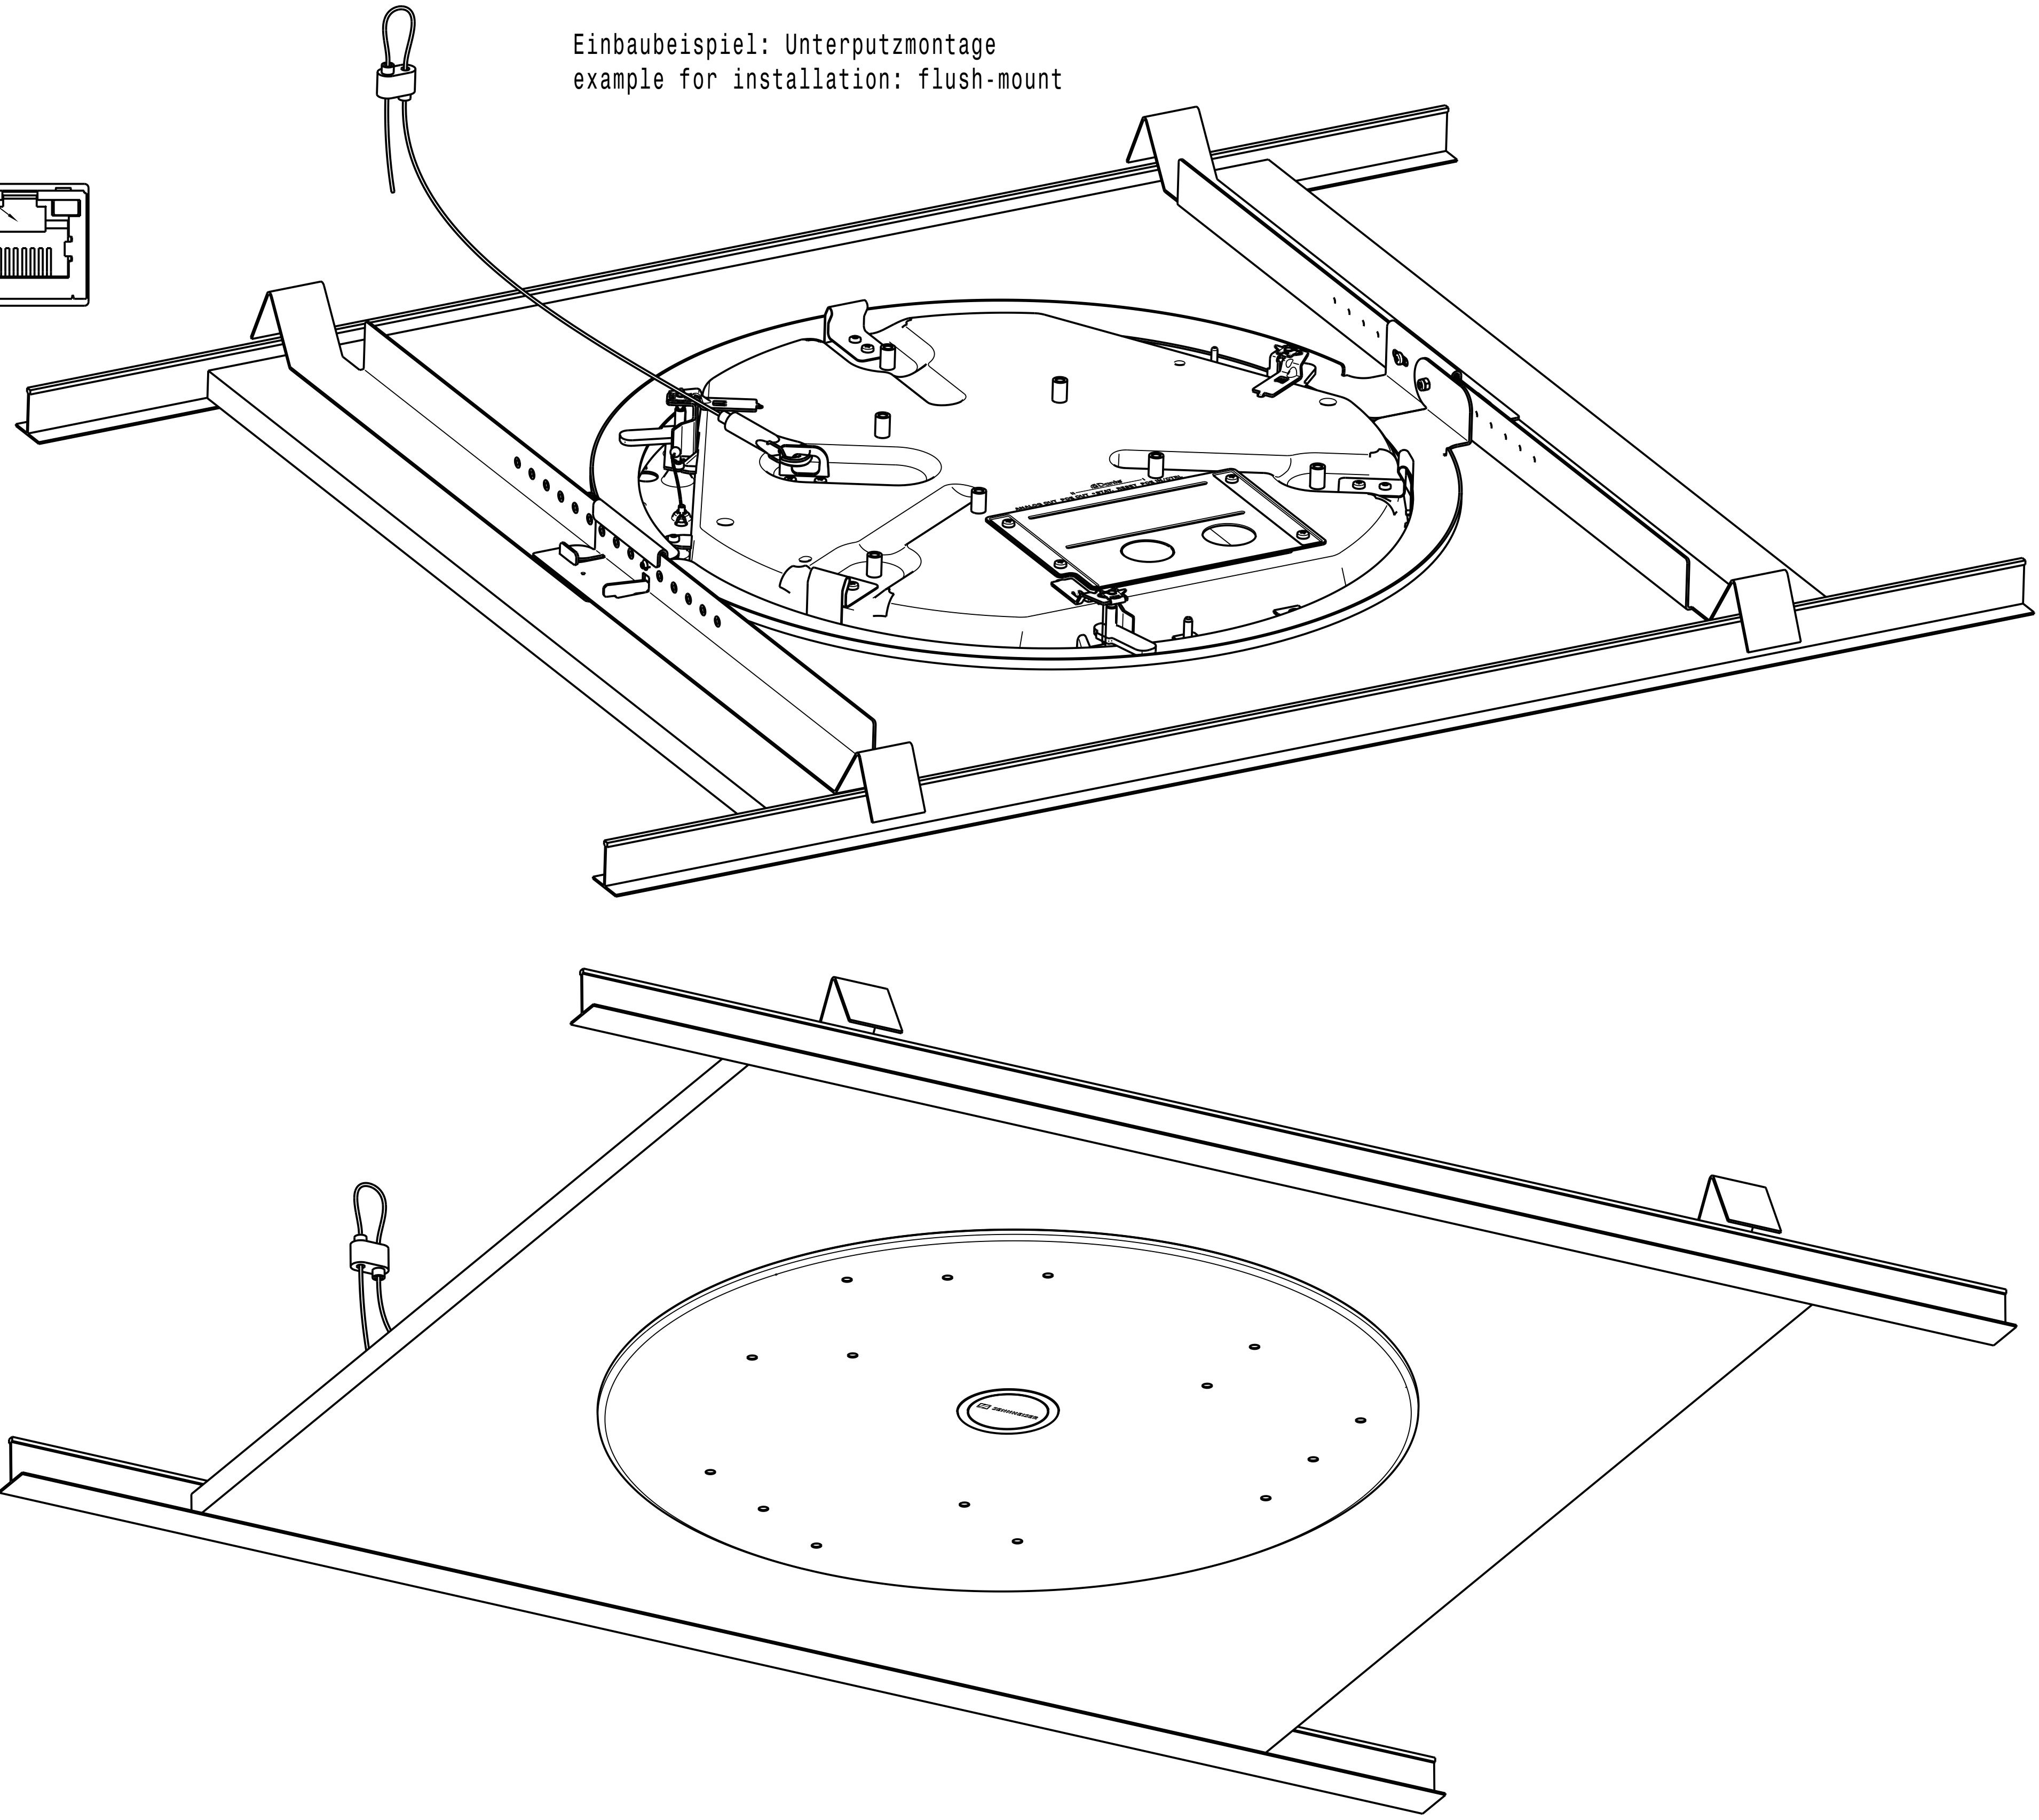

46.3
1.8"
compatible with tile thickness from 12 mm to 23 mm
compatible with tile thickness from 0.47" to 0.9"

safety/mount wire set included

M4 (3x), matching suspension wire set included

compatible with tiles from 600 mm up to 625 mm edge length
compatible with tiles from 1.9685 ft to 2.05052 ft edge length

knockout area for optional 2nd conduit

Ø26.5 compatible with PG16 conduits
Ø 1.04" compatible with 3/4" conduits

detrachable cable duct cover included

Ø26.5 compatible with PG16 conduits
Ø 1.04" compatible with 3/4" conduits

recommended cutout profile

Ø390 ±0.3
Ø 15.35" ±0.12"

Abmessungen mit Einbauszubehör size with installation kit Länge x Breite x Höhe length x width x height	647.3 mm x 522.8 mm x 46.3 mm 25.5" x 20.6" x 1.8"
Abmessungen ohne Einbauszubehör size without installation kit Länge x Breite x Höhe length x width x height	407 mm x 407 mm x 46.3 mm (Ø407 mm x 46.3 mm) 16" x 16" x 1.8" (Ø16" x 1.8")
Masse mit Einbauszubehör mass with installation kit	4.81423 kg
Masse ohne Einbauszubehör mass without installation kit	3.47752 kg

für detaillierte Berechnung der Massen siehe CIW-DokNr.: 000142133
for detailed calculation of mass see CIW-doc. no.: 000142133

700170	Material / Material	Bezeichnungen / Remarks
Teil-Nr. Part No.	2002708-n	
Abmessungen Dimensions	all dimensions in mm	Skala Scale
1:2		
SENNHEISER	Documententwurf Status of Document	Drucknummer Drawing Number
01	05.01.2023	27a
Freigegeben/Released		
MICROPHONE		
OUTLINE DIMENSIONS TCC-M FLUSH MOUNT		
TCC M70Q170_2D_OUT.FPM		